




SLD- 4601 45mm Full Extension Ball Slide

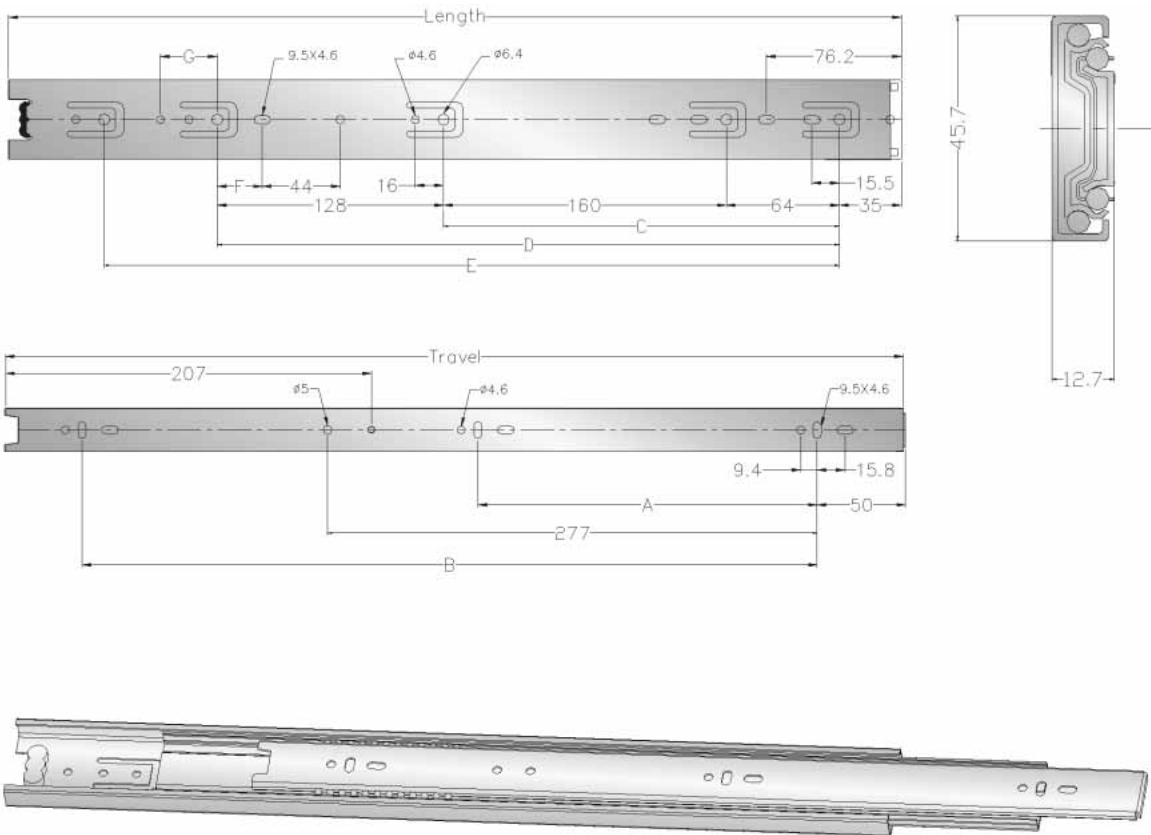

| SIZE | LENGTH | TRAVEL | A | B | C | D | E | F | G |
|------|--------|--------|-------|-------|-----|-----|-----|------|----|
| 10 | 250 | 254 | - | 176 | - | - | 148 | - | - |
| 12 | 300 | 305 | 88 | 224 | - | - | 200 | - | - |
| 14 | 350 | 356 | 108.5 | 255.5 | 224 | - | - | - | - |
| 16 | 400 | 406 | 135.5 | 320.5 | 224 | - | 288 | - | - |
| 18 | 450 | 457 | 160 | 352 | 224 | 352 | - | - | - |
| 20 | 500 | 508 | 192 | 416 | 224 | 352 | 416 | 25.5 | 32 |
| 22 | 550 | 559 | 210.5 | 474.5 | 224 | 352 | 416 | 25.5 | 32 |
| 24 | 600 | 610 | 235 | 511 | 224 | 352 | 480 | 25.5 | 32 |
| 26 | 650 | 660 | 260 | 576 | 224 | 352 | 544 | 25.5 | 32 |
| 28 | 700 | 711 | 280 | 576 | 224 | 352 | 544 | 25.5 | 32 |

- Side bottom mount
- 1-13/16" height
- 1/2" plus 1/32" clearance
- Load rating of 100LB. class1, Suggest. FIRA test approval
- Telescoping movement on precision steel ball bearings
- 32mm hole pattern with direct access
- Zinc, Black or yellow chromate plated
- 1" over travel optional